

IPPC-4001D

5.7" VGA TFT LCD 4U 19" Rack Industrial Panel PC with 14 Expansion Slots & Keyboard Drawer

NEW



Features

- 4U height 19" rackmount chassis with 5.7" VGA TFT display
- Slim keyboard & mouse pad drawer with lockable clip
- Supports high performance Intel Core 2 Duo processors (and up)
- Offers 14 expansion slots for 2 PICMG, 10 PCI, 2 ISA
- Lockable front door prevents unauthorized access
- Membrane function keys (F1-F5) for varied application access
- Handy screen function for Industrial Automation Controller and Monitoring
- Front accessible USB is friendly to plug-in versatile USB devices
- All-in-one IPC system for saving cost/space from IPC with LCD/keyboard
- Telecom/Power Station portal and platform for test & measurement equipment
- Suitable for Automatic Testing Equipment and Production Line Testers

Introduction

IPPC-4001D is a 4U 19" rackmount Industrial Panel PC with 5.7" VGA TFT LCD display, passive backplane and ISA/PCI/PICMG expansion slots. Designed to be an all-in-one and cost-effective solution for traditional IPC users, IPPC-4001D includes a slim type 85 key keyboard and touch pad drawer making input troublefree, and a 5.7" TFT LCD screen is perfect for information displays like: charts, trends, a control panel, simple programming, production data or field monitoring records. A wide range of standard computing peripherals from the Advantech IPC family can be integrated into the unit to meet different application development requirements in mission-critical environments.

Specifications

General

- **Button Control** Membrane Key 5 Function Keys (F1 to F5), 5 Cursor Keys (Up, Down, Left, Right, Enter)
- **Certifications** BSMI, CCC, CE, FCC, UL
- **Dimensions (W x H x D)** 482 x 174.9 x 486.7 mm (18.97" x 6.88" x 19.16")
- **Keyboard Drawer** Integrated 88-Key (US) slim type keyboard w/touch pad
- **Mounting** 19" Rack
- **Power Input** 90 ~ 264 VAC @ 47 ~ 63 Hz full range 6.0/3.0A
- **Power Supply** 300 W
- **Weight** 19.99 kg (44 lbs)

System Hardware

- **Passive Backplane** PCA-6114P10
- **Slots** 2 PICMG, 10 PCI, 2 ISA
- **Backplane Size** 315 x 260 mm (12.4" x 10.24")
- **PCI Bridge** Pericom PI7C8150MA
- **PCI Slot** Primary: 3 slots, Secondary: 7 slots
- **Storage** 3 x 5.25" CD-ROM Bay

LCD Display


- **Backlight Life** 50,000 hrs (LED Backlight)
- **Contrast Ratio** 300 : 1
- **Display Size** 5.7"
- **Display Type** VGA TFT LCD
- **Luminance** 220 cd/m2
- **Max. Colors** 262 K (RGB 6-bit)
- **Max. Resolution** 640 x 480
- **OSD Control** ON/OFF, Brightness down, up
- **Viewing Angle (H/V°)** 140/100

Environment

- **Humidity** 5 ~ 85% RH @ 40° C (non-condensing)
- **Ingress Protection** Front panel NEMA4/IP65
- **Operating Temperature** 0 ~ 50° C (32 ~ 122° F)
- **Storage Temperature** -20 ~ 60° C (-4 ~ 140° F)
- **Vibration Protection** 5 ~ 500 Hz, 1 GRMS random vibration (operating)
- **Ordering Information**
- **IPPC-4001D-BOAE** 5.7" VGA 4U 19" IPPC, 300W, 2 PICMG, 10 PCI, 2 ISA

Dimensions


Unit: mm

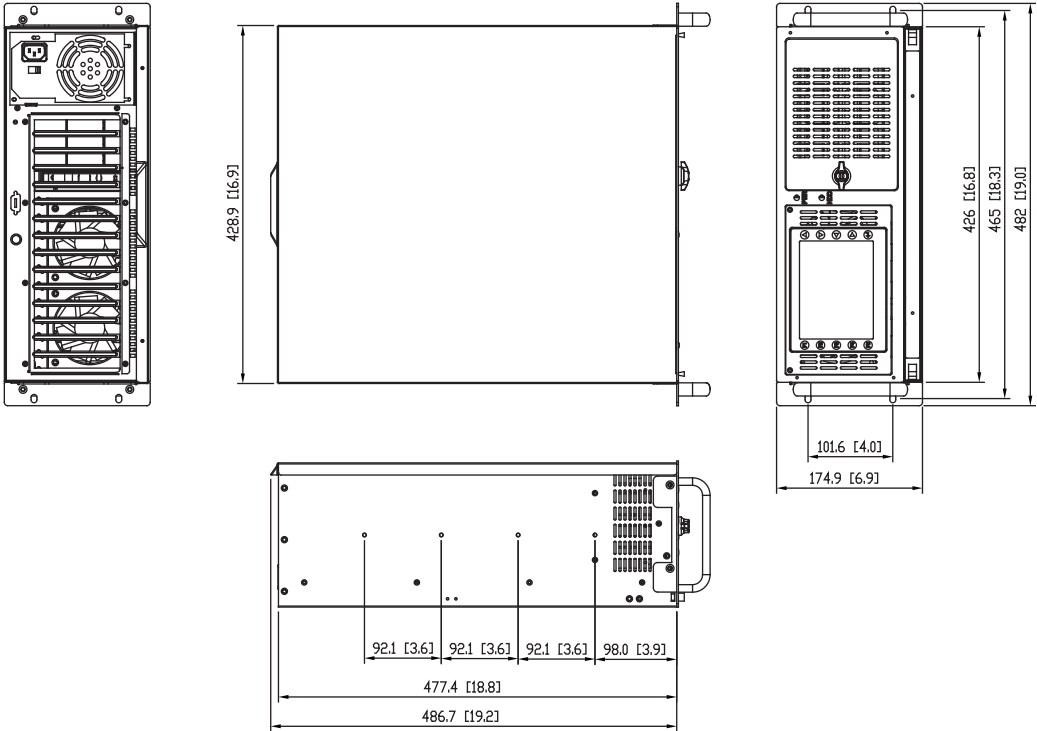

CPU Card Suggestions

Part No	CPU Grade	Description
PCA-6194G2-00A1E	Intel Core 2 Duo (1066/800/533 MHz FSB)	LGA775 Core 2 Duo/Pentium D/Pentium 4/Celeron D Processor Card with IPMI/VGA/Dual GbE LAN (FSB 1066/800 MHz)
PCA-6190VG-00A2E	Intel Pentium 4 (533/800 MHz FSB)	LGA775 Pentium 4/Celeron Processor Card with VGA/LAN/
PCA-6187VG-00A2E	Intel Pentium 4 (400/533/800 MHz FSB)	Socket 478 Pentium 4/Celeron D/Celeron Processor Card with VGA/LAN
PCA-6008VG-06A1E	Intel Pentium M/Celeron M (533 MHz FSB)	Socket 479 Pentium M/ Celeron M Processor Card with VGA/ DVI/ Dual GbE LAN

System View

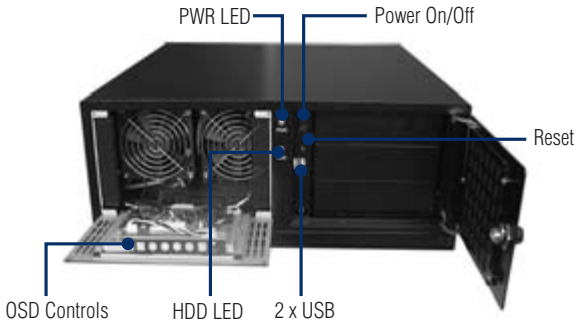

Accessories

- 1702002600 Power Cable US Plug 1.8 M
- 1702002605 Power Cable EU Plug 1.8 M
- 1702031801 Power Cable UK Plug 1.8 M
- 1702031836 Power Cable China/Australia Plug 1.8 M

Rear View

