MPC175-851-FL

17" TFT Fanless Super Slim Medical Grade Panel Computer with Intel® Core™2 Duo Processor up to 2.26 GHz



Features







- 17" high brightness (380 nits) SXGA TFT LCD
- Fanless socket P Intel® Core™2 Duo or Intel® Celeron® M processor
- UL60601-1/EN60601-1, CE & FCC class B certified
- Spill and dust resistant design (front panel: IP65, whole enclosure: IPx1)
- Optional combo drive (for MPC175-851-FL-AC-CO)
- 1 PCI or PCIe x4 expansion slot (for MPC175-851-FL-AC-PCI or MPC175-851-FL-AC-PCIe)
- Optional Bluetooth/RFID reader
- Built-in 1.3 mega pixels camera
- Optional internal wireless (802.11 b/g) antenna



- 1. Brightness adjust buttons
- 2. Volume adjust
- buttons 3. Power LED
- 5. COM 1 (RS-232/422/485)
- 6. Ethernet x 2
- 7. USB 2.0 x 2
- 8. Audio (Line-out/Mic-in)
- 9. VGA
- 10. Power connector
- 11. Power switch
- 12. PCI or PCIe slot





Compact Combo drive

I/O cover

Thermal module

Introduction

The MPC175-851-FL is a 17-inch slim TFT fanless medical grade panel computer, which is well-suited for applications like medical image processing and medical measuring instrument. Especially designed for the medical environment, it adopts IPX1 waterproof design which protects the entire system from outside liquid, preventing system from crashing. Powered by socket P Intel® Core™2 Duo processor and PCI expansion slot, the MPC-175-851-FL is definitely the best choice for your medical panel computer.

This platform complies with UL60601-1/EN60601-1, CE, FCC Class B certifications to ensure medical operation safety. It is outfitted with 17-inch SXGA TFT LCD display. Additionally, the MPC175-851-FL offers flexible CPU selection with socket

type which reduces cost, increases convenience over onboard CPU, and still maintains a fanless operation and long product life cycle. For expansion capability, the unit supports one PCI or PCIe x4 slot for video capture card, data acquisition card and more. The built-in 1.3 mega pixels camera, microphone and stereo speakers allow medical professionals to execute remote operation. Bluetooth is an available option for wireless connection with medical peripheral devices. Optional WiFi (802.11 b/g) allows wireless real-time connection of patient record for assessment. To improve patient treatment accuracy, the optional RFID (radio frequency identification) offers an efficient way to validate patient identification and give proper treatment.

Specifications

Frent Bezel	Plastic ABS		BIOS	AMI BIOS with SmartView and customer	
LCD Panel	Display Type	17" SXGA TFT		CMOS backup	
	Brightness (cd/m²)	380 nits	Storage	Supports 1 x 2.5" SATA HDD	
	Resolution	1280 x 1024		1 x CompactFlash™	
	Viewing Angle (H/V)	160°/160°	Optional Drive	1 x compact	
Main System	CPU	Fanless socket P Intel® Core™2 Duo or		8X/24X combo drive	
		Intel® Celeron® M processor		(for MPC175-851-FL-AC-CO)	
	Chipset	Intel® GM45+ICH9M	Watchdog Time	Watchdog Timer 255 levels, 0~255 sec.	
	System Memory	Supports 2 x DDR3 SO-DIMM memory	Onboard	Intel® GM45	
		up to 8 GB	Graphics		

I/O Connector	1 x RS-232/422/485 (COM 1) 2 x USB 2.0 1 x Audio (Mic-in/Line-out) 2 x 10/100/1000Mbps Ethernet 1 x VGA
Expansion Interface	1 x PCI or PCIe x4 slot (for MPC175-851-FL-AC-PCI or MPC175-851-FL-AC-PCIe)
Camera	1 x 1.3 mega pixels camera
Touchscreen	Resistive type Light transmission: 80% Touch life 35 million touches
Power Supply	External 24V AC/DC medical grade power adapter
Dimensions	438 x 76.5 x 376.4mm (17.24" x 3.01" x 14.81")
Weight (net/gross)	7.65 kg (16.85 lb)/9 kg (19.84 lb)
Environmental	Operation temperature: 0°C ~ +40°C (32°F ~ 104°F) Relative humidity: 10% ~ 95%, non-condensing Shock: 10G peak acceleration (11 sec. duration)
Certification	CE, FCC class B, EN60601-1, UL60601-1

Ordering Information

MPC175-851-FL-AC-CO	17" TFT fanless medical grade panel computer with
	resistive T/S and slim Combo
	resistive 175 and still combo
MPC175-851-FL-AC-PCI	17" TFT fanless medical grade panel computer with
	resistive T/S, PCI expansion, w/o CD-ROM
MPC175-851-FL-AC-PCle	17" TFT fanless medical grade panel computer with
	resistive T/S, PCIe x4 expansion, w/o CD-ROM

^{*}Specifications and certifications are limited to optional.

Optional Accessories

E202003330	VM-101 VESA ARM (clamp type)
E202003329	VM-105 VESA ARM (wall mount type)
E228170100	17" stand kit


Optional OS Installation





Stand kit

Dimensions

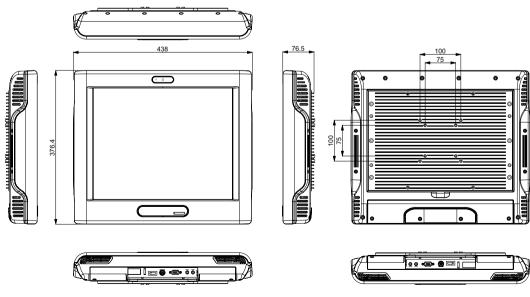

OPEN I/O COVER VIEW

482

Medical Panel Computers